Avery Dennison® Supreme Protection Film Warranty Bulletin 1.0

ANZ Revision number: 0 Date: 05-2018

Avery Dennison® Supreme Protection Film Warranty

Avery Dennsion Paint Protection Film	Warranted period in years Zone 1	Warranted period in years Zone 2	Warranted period in years Zone 3	Application Substrate				
				Flat	Simple curves	Rivets	Compound curves	Deep Recesses & Corrugations
- SPF-XI Supreme Protection Film	10	5	3	•	•	•	•	-

Important Note: Where the material is applied in a 'marine environment', the stated warranty period will be reduced by 20%.

General Warranty Statement: Avery Dennison® Product Limited Express Warranty

Avery Dennison warrants that the Product will be free from defects in manufacturing and workmanship (as defined below) upon shipment, and when used according to Avery Dennison's written instructions, will under normal conditions provide Durability for the period stated in this Avery Dennison Warranty, subject to the Avery Dennison Supreme Protection Film Warranty Terms and Conditions 1.0.

"Durability" for the purpose of this warranty means that the Product situated outdoors, and applied to recommended surfaces, will not deteriorate excessively such as, film discoloration, cracking, crazing, blistering, excessive gloss changes, excessive dimensional change or loss of adhesion, due solely to a defect in the Product in manufacturing or workmanship. Durability is based on Australian and New Zealand outdoor exposure conditions (Zones 1, 2 & 3), unless otherwise stated, and applied to recommended substrates. Actual performance life will depend on a variety of factors, including but not limited to substrate preparation, exposure conditions and maintenance of the Product. In case of use in areas of high temperature or humidity, in industrially polluted areas or other areas with air laden particulate matter, and/or in high altitudes, Durability will be reduced.

This warranty does not extend coverage caused by misuse, accident, misapplication, normal wear and tear, or dents from road debris impact, collisions and/or intentional damage of any kind.

Defect Coverage for Product Defined in this Durability Bulletin

- Manufacturing & Workmanship Defects. A failure of the Product to materially conform to the Avery Dennison written manufacturing specifications for the Product.
- Cutting Defects. A failure of clean cutting and weeding characteristics when cut as recommended in the applicable Avery Dennison Product Data Sheet and Instructional Bulletins, due solely to a defect in the Product in manufacturing or workmanship.
- Durability. Excessive film discoloration, cracking, crazing, blistering, excessive gloss changes, excessive dimensional change or loss of adhesion, due solely to a defect in the Product in manufacturing or workmanship.

Recording of Installation Details and Product Information - Warranty Form

This warranty is expressly conditioned on the purchaser ensuring that each individual vehicle where the Avery Dennison Supreme Protection Film is being installed to, is recorded using the provided Warranty Form. Information, including company name, installer name, installation date, location, vehicle make, model, colour, VIN, lot/ref numbers of Avery Dennison Product used are required in order to validate the warranty.

The Supreme Protection Film Warranty Form can be found here: https://goo.gl/forms/3iJn2MAKKq9zGGdQ2

Avery Dennison® Supreme Protection Film Additional information on film durability

Warranted Period Definitions

The warranted period communicated in this Warranty Bulletin, is the maximum period of time Avery Dennison will warrant the finished products performance in accordance with SPF-XI Supreme Protection Film Warranty Terms and Conditions 1.0, provided that the film is properly stored, converted and installed and maintained in accordance with Avery Dennison guidelines.

Other Potential Durability Reductions

High elevations: In mountain areas UV damage is increased over exposures at sea level. This is due to the air being thinner and therefore damage of UV radiation increases significantly. Congested urban or industrial areas: Due to increased smog, pollutants and particulates in the atmosphere, applications of this kind have reduced durability expectations. Horizontal applications trap pollutants on the surface of the material, increasing the impact of UV exposure and reducing durability.

Zone chart

Zone 1

Tasmania.

Zone 2

Adelaide, Albany, Brisbane*, Canberra, Coffs Harbour, Esperance, Melbourne, New Zealand, Perth*, Sydney.

Zone 3

Alice Springs, Broken Hill, Broome, Cairns, Carnarvon, Ceduna, Cook, Darwin, Dubbo, Geraldton, Kalgoorlie, Mackay, Mount Isa, Newman, Port Augusta, Port Hedland, Telfer, Townsville.

*All areas 100km North of line between Perth and Brisbane.

All locations (mentioned in zones 1, 2 and 3) when installed above altitudes of 1000 meters.

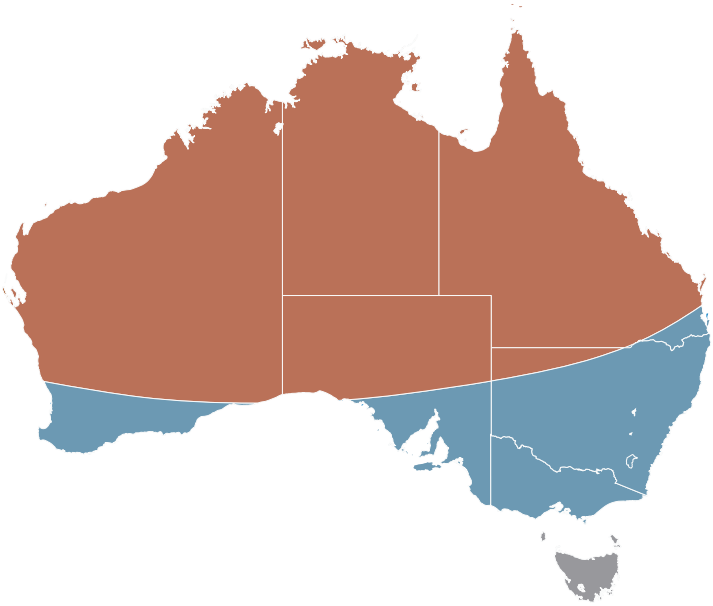

New Zealand
40 Vestey Drive
Mt Wellington, Auckland 1060
T: 09 573 0995

Australia
1124 Centre Road
Oakleigh South, Victoria 3167
T: 1800 888 560